

Merchandising Keyboard table module

Item.no IS-9413-3/4

Complete with:

- 1 post with feet,
- 1 counter top and 1 base plate,
- 2 table posts,
- 4 table feet,
- 2 T-box connectors,
- 1 graphic stiffener,
- 1 set kicker and hanger



Accessories



LED spotlights in bag
12V / 18 W incl. transformer
Item IS-SL-LED



Floating shelf, item IS-9454



Media screen holder
Small, item IS-80-TM02
Large, item IS-80-TM03



Bag for table
Item IS-80-TB03



Slatwall system



1 Screw in the 4 adjustable feet in the base plate so the height from the floor will be 22 mm/0.86".



2 Attach the base plate to an existing module and to the included base post.



3 Complete the post with the extension and top post.



4 Attach the 2 table posts and lock the bottom FASTclamps.



5 Attach the 2 T-box connector on the inner edge of the post mag tape, with mag tape on the T-box facing outward (facing right on the right hand post, left on the left hand post).



6 Attach the table top and lock the 2 FASTclamps on the reverse side...



7 ...and the 2 FASTclamps at the posts. Attach the graphic panels and the table installation is complete.

Graphic panel production

Wall graphic

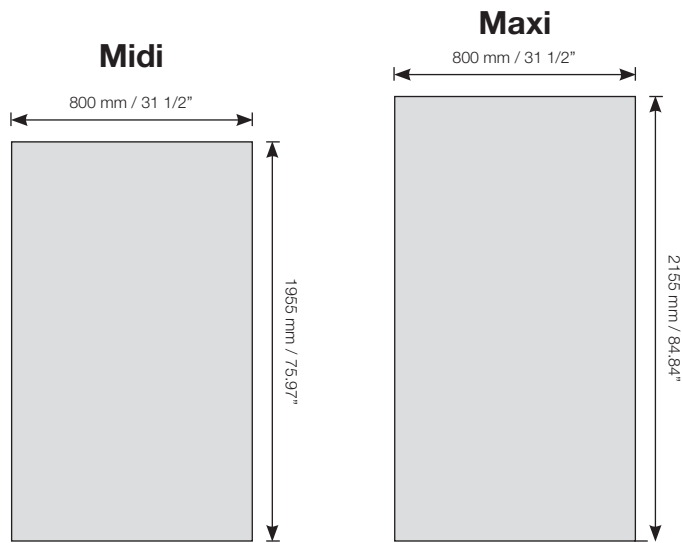


Table graphic




A template for the graphic panel production can be downloaded at:
<http://markbricdisplay.net/imagebank/PT-general.html>

Graphic panel attachments


Accessories

Kickers & Hangers
800 mm / 31 1/2" Item: IS-800-KHN

Magnetic tape (not incl.)
12 mm / 0.5", Item: 82281
24 mm / 1", Item: 82282

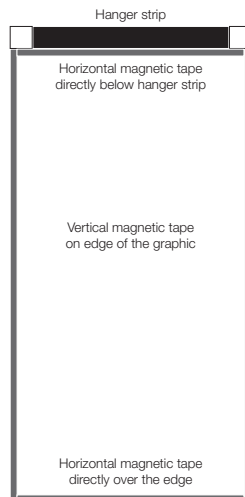

Kicker strip not needed in this setup!

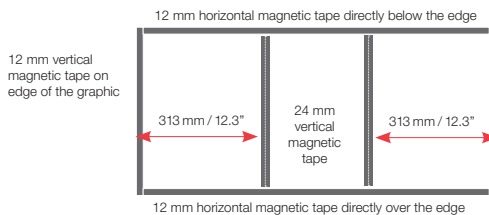

Printer material

We recommended the following material:

Poster paper: 180 gr / 0.4 lb.
The printed graphic panels must be laminated before use.
Front side: 125 microns (0,125 mm) / 0.005"
Reverse side: 250 microns (0,250 mm) / 0.010" stop light"

Polyester film: 330-370 microns (0,350 mm) / 0.013-0.015"
Top laminate: 125 microns (0,125 mm) / 0.005"



Kicker



Hanger

Mounting of Kickers and Hangers

Kickers and hangers to be fixed at the bottom and at the top of the graphic panels (reverse side).

Mounting of Magnetic Tape

Magnetic tape to be fixed **horizontally** directly over/under kicker/hanger strip. Magnetic tape to be fixed **vertically** along each side of the graphic panels.

IMPORTANT Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.

