


Tower module

Item.no: **Midi** IS-9457-1 (Height 279 cm/110")
Maxi IS-9457-2 (Height 299 cm/118")

Complete with:

- 2 Base post, 750 mm, adj. foot
- 4 Extension post, 750 mm
- 2 Top post, 505 mm
- 1 Top post, 485 mm
- 2 Extension post, 200 mm
- 9 Curved beam 30°
- 2 Corner trims, 770
- 4 Corner trims, 750/850
- 3 Corner trims, 500
- 3 Kickers & Hangers

Midi IS-9457-1	Maxi IS-9457-2
IS-0750-EBM	IS-0750-EBM
IS-0750-EEM	IS-0750-EEM
IS-0505-ETM	IS-0505-ETM
IS-0485-ETM	IS-0485-ETM
IS-0200-EEM	IS-0200-EEM
IS-8030-O	IS-8030-O
IS-0770-CT	IS-0770-CT
IS-0750-CT	IS-0850-CT
IS-0500-CT	IS-0500-CT
IS-800-KHN	IS-800-KHN

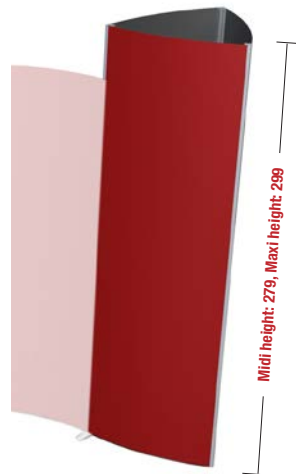


Accessories



Media screen holder
For curved beams, VESA 75/100
Item IS-9004



Leveling tool
Item IS-9012

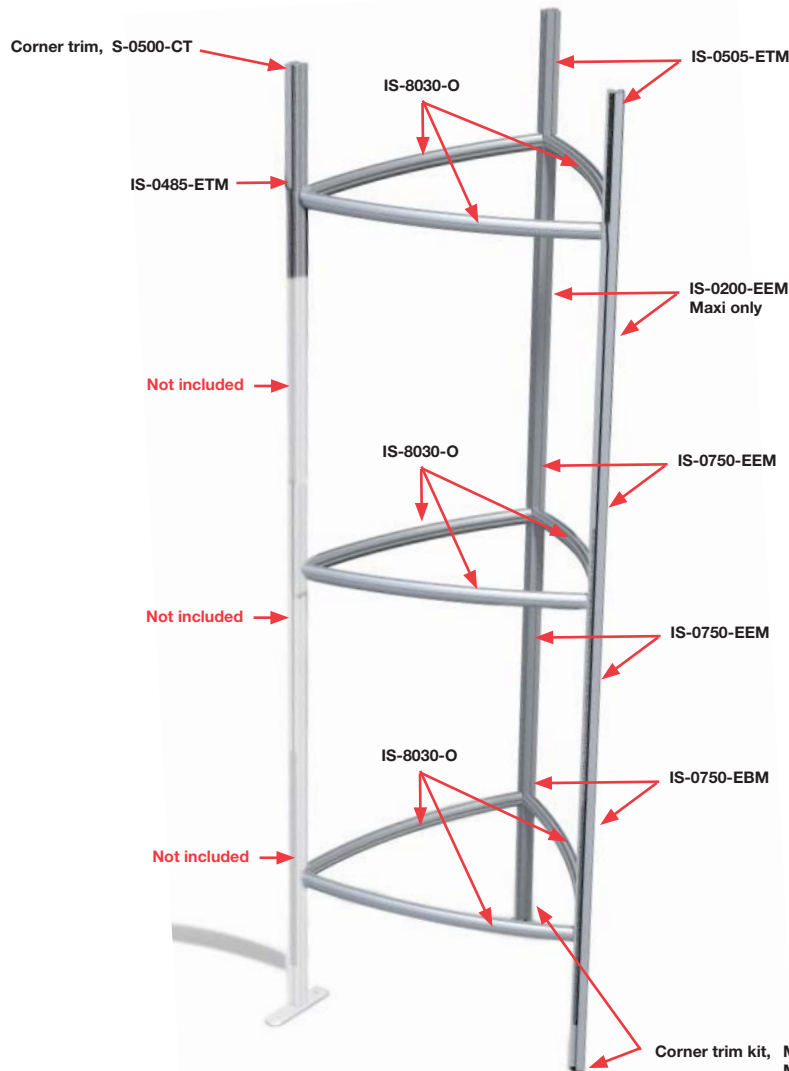

1 Please observe, you must use a Midi height tower for a Midi wall and a Maxi for Maxi wall.


2 This 'end module' unit can be used on either the left or right hand end of your existing ISOframe module.

3 First, mount the short top post (IS-0485-ETM) in the top hub on either end of your existing ISOframe module.


4 Build the tower module according to the schematic shown above.

5 As with all fixed-beam modules, be sure to level the tower module before mounting your graphic panels.

Graphic production and corner trim

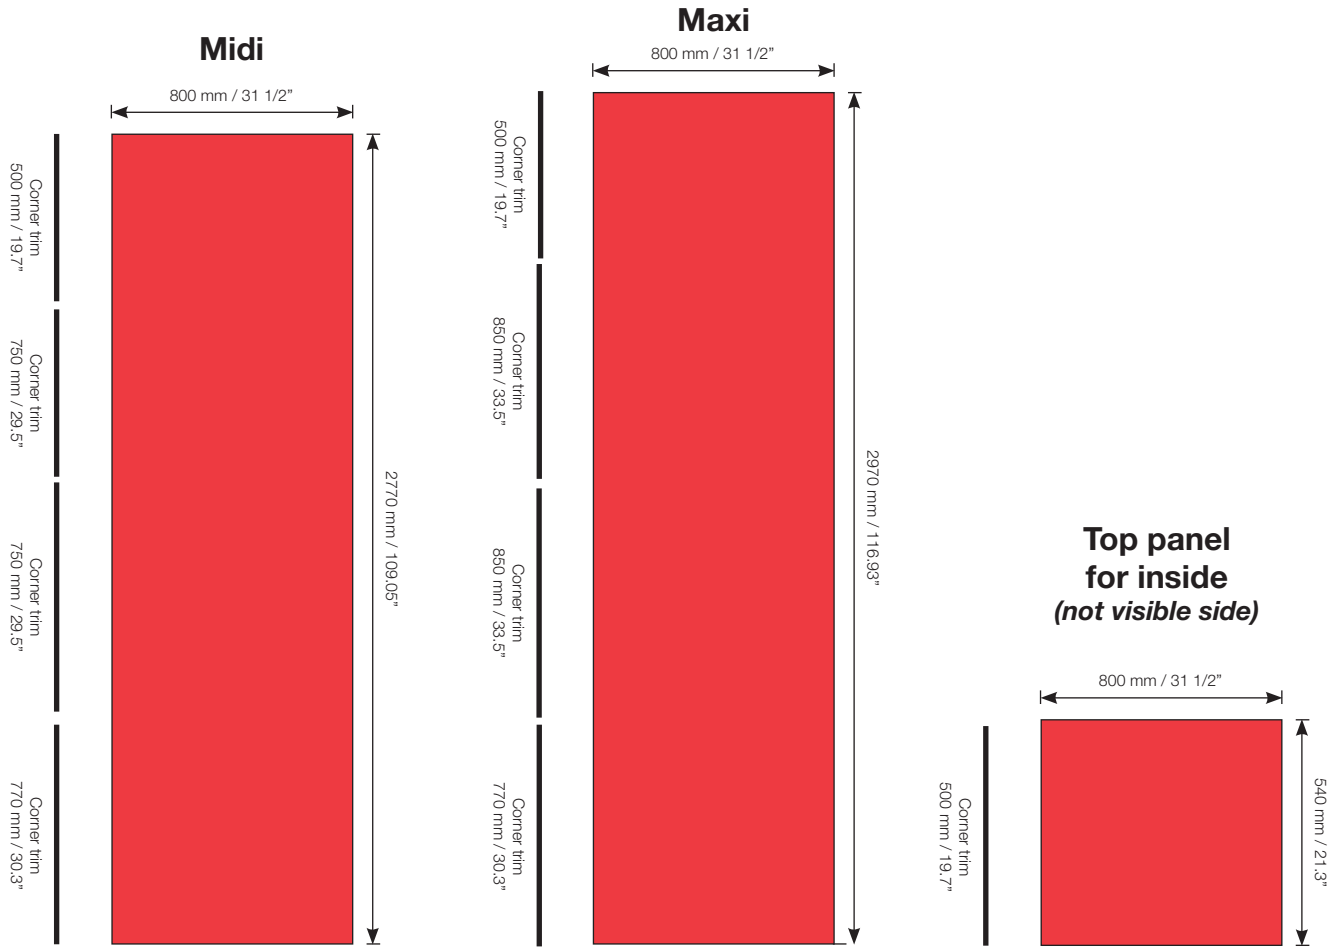

Graphic panel attachments

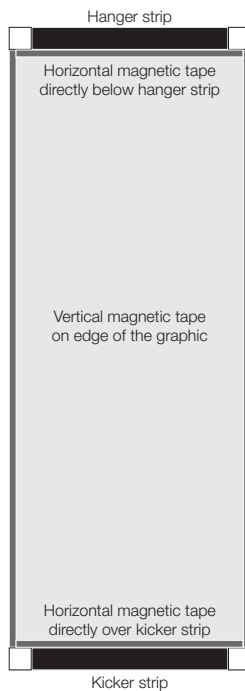

Accessories

Kickers & Hangers

(incl. for the first set of panels)
800 mm / 31.5"

Item IS-800-KHN

Magnetic tape (not incl.)

12 mm/0.5" A tape, 30 m / 98 ft. Item 82281

All 3 panel needs:

Midi 18,4 m / 61 ft.

Maxi 18,8 m / 62 ft.

Printer material

We recommend the following material:

Poster paper: 180 gr / 0.4 lb.

The printed graphic panels must be laminated before use.

Front side: 125 microns (0,125 mm) / 0.005"

Reverse side: 250 microns (0,250 mm) / 0.010" "stop light"

Polyester film: 330-370 microns (0,350 mm) / 0.013-0.015"

Top laminate: 125 microns (0,125 mm) / 0.005"



Kicker



Hanger

Mounting of Kickers and Hangers

Kickers and hangers to be fixed at the bottom and at the top of the graphic panels (reverse side).

Mounting of Magnetic Tape

Magnetic tape to be fixed **horizontally** directly over/under kicker/hanger strip. Magnetic tape to be fixed **vertically** along each side of the graphic panels.

IMPORTANT Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.