

### Merchandising Semi-circular table module

Item.no IS-9415-3/4

**Complete with:**

- 1 post with feet,
- 1 counter top and 1 base plate,
- 2 table posts,
- 4 table feet,
- 2 T-box connectors,
- 1 graphic stiffener,
- 1 set kicker and hanger



#### Accessories



**LED spotlights in bag**  
12V / 18 W incl. transformer  
Item IS-SL-LED



**Floating shelf**, item IS-9454



**Media screen holder**  
Small, item IS-80-TM02  
Large, item IS-80-TM03



**Bag for table**  
Item IS-80-TB05



**Slatwall system**



**1** Screw in the 4 adjustable feet in the base plate so the height from the floor will be 22 mm/0.86".



**2** Attach the base plate to an existing module and to the included base post.



**3** Complete the post with the extension and top post.



**4** Attach the 2 table posts and lock the bottom FASTclamps.



**5** Attach the 2 T-box connector on the inner edge of the post mag tape, with mag tape on the T-box facing outward (facing right on the right hand post, left on the left hand post).




**6** Attach the table top and lock the 2 FASTclamps on the reverse side...




**7** ...and the 2 FASTclamps at the posts. Attach the graphic panels and the table installation is complete.

**Graphic panel production**

**Wall graphic**

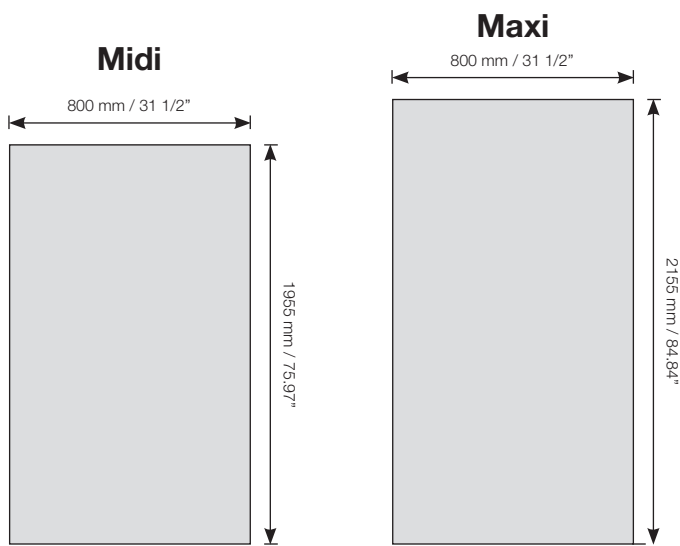

**Table graphic**

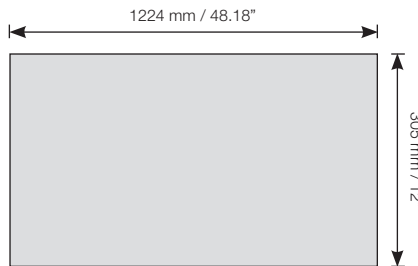


A template for the graphic panel production can be downloaded at:  
<http://markbricdisplay.net/imagebank/PT-general.html>

**Graphic panel attachments**


**Accessories**

**Kickers & Hangers**  
800 mm / 31 1/2" Item: IS-800-KHN

**Magnetic tape** (not incl.)  
12 mm/0.5", Item: 82281  
24 mm/1", Item: 82282

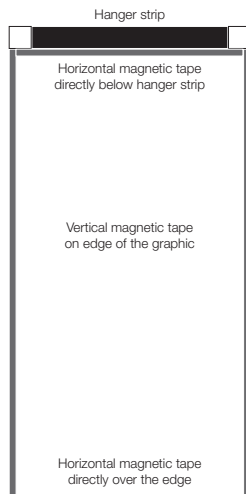

**Kicker strip not needed in this setup!**

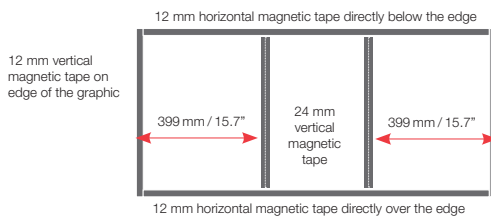

**Printer material**

We recommended the following material:

**Poster paper:** 180 gr / 0.4 lb.  
*The printed graphic panels must be laminated before use.*  
Front side: 125 microns (0,125 mm) / 0.005"  
Reverse side: 250 microns (0,250 mm) / 0.010" "stop light"

**Polyester film:** 330-370 microns (0,350 mm) / 0.013-0.015"  
Top laminate: 125 microns (0,125 mm) / 0.005"



**Kicker**

**Hanger**

**Mounting of Kickers and Hangers**

Kickers and hangers to be fixed at the bottom and at the top of the graphic panels (reverse side).

**Mounting of Magnetic Tape**

Magnetic tape to be fixed **horizontally** directly over/under kicker/hanger strip. Magnetic tape to be fixed **vertically** along each side of the graphic panels.

**IMPORTANT** Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

**Application Techniques**

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.

