

### Oval shelving module

Item.no IS-9416-1/2

**Complete with:**

- 1 post with feet,
- 2 top shelf,
- 1 bottom shelf
- 1 table posts,
- 4 T-box connectors,
- 4 table feet.



#### Accessories



**LED spotlights in bag**  
12V / 18 W incl. transformer  
Item IS-SL-LED



**Floating shelf**, item IS-9455



**Media screen holder**  
Small, item IS-9004  
*Must be used with a 90° inside curved beam.*



**Bag for table**  
Item IS-80-TB05



**1** Screw in the 4 adjustable feet in the base plate so the height from the floor will be 22 mm/0,86".



**2** Attach the base table to the module you built before and to the included base post.



**3** Complete the posts with the extension and top post



**4** Attach the table posts and lock the bottom FASTclamp



**5** Attach the 2 T-box to the system with the magnetic tape outside from the table.



**6** Attach the table top and lock the 2 FASTclamp's on the reverse side...



**7** ...and the 2 FASTclamp,s at the posts, assemble the graphic panel above the tabletop.




**8** Mount one of the top shelves upside down on the top of the graphic panel.




**9** Attach the 2 T-box over the shelf with the magnetic tape outside from the table. Attach the graphic panels at the base and top and you are ready

### Graphic panel production


#### Top graphic

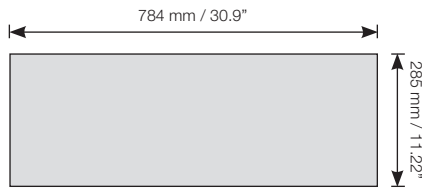

#### Wall graphic

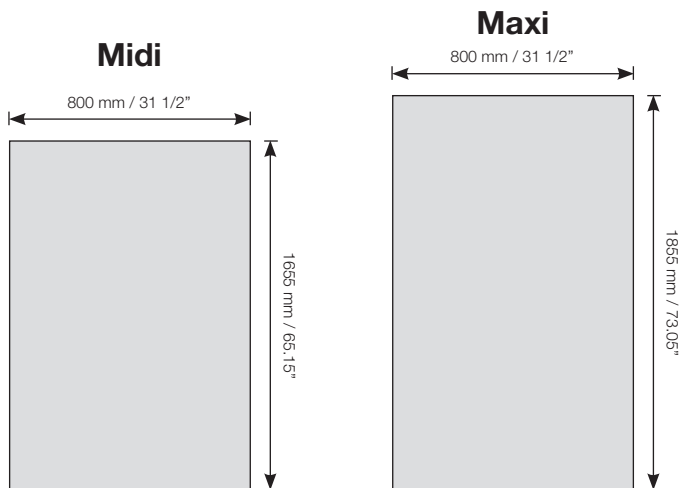

#### Table graphic

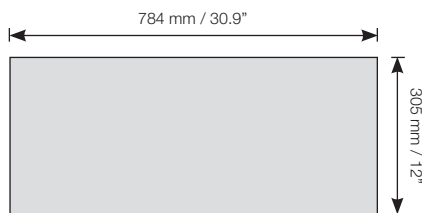

### Graphic panel attachments



#### Accessories

##### Kickers & Hangers

800 mm / 31 1/2" Item: IS-800-KHN

##### Magnetic tape (not incl.)

12 mm / 0.5", Item: 82281  
24 mm / 1", Item: 82282

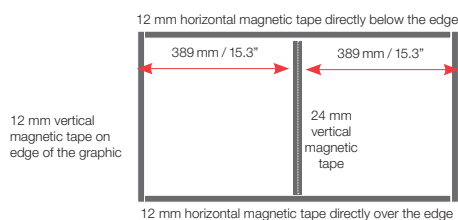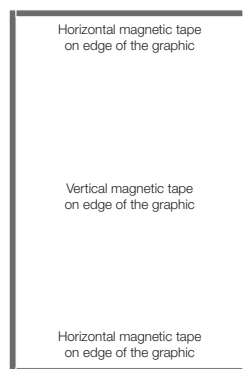

#### Printer material

We recommend the following material:

**Poster paper:** 180 gr / 0.4 lb.

*The printed graphic panels must be laminated before use.*  
Front side: 125 microns (0,125 mm) / 0.005" "deep crystal"  
Reverse side: 250 microns (0,250 mm) / 0.010" "stop light"

**Polyester film:** 330-370 microns (0,350 mm) / 0.013-0.015"  
Top laminate: 125 microns (0,125 mm) / 0.005" "deep crystal"

#### Mounting of Hangers

Hangers to be fixed at the top of the wall graphic panel (reverse side).

#### Mounting of Magnetic Tape

Magnetic tape to be fixed on the graphic panels. (See picture)

**IMPORTANT** Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

#### Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.

